


FURTUN ABSORBȚIE INOVAFLEX

Flexible hose made of soft PVC wall, reinforced with shock-resistant PVC spiral

Applications	irrigation, water drain, fertilizer spreading, waste water, construction machines
Structure	soft PVC, green, transparent, plastic spiral / rigid PVC
Temperature	-5°C up to 60°C
Properties	good flexibility, high vacuum resistance, corrugated outside, very smooth inside, hydrolysis & microbe resistant, good ozone- & UV-resistance, weather proof, phthalate-free
Norms	ISO 1307

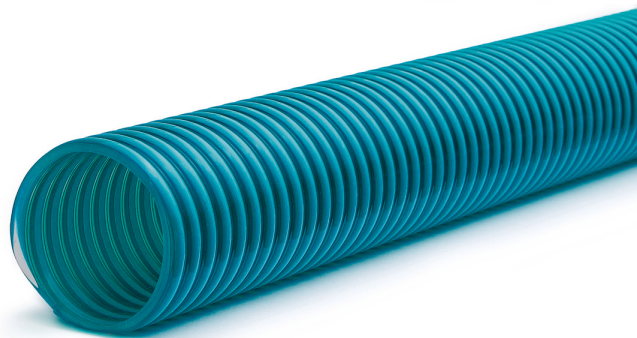

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Weight (kg/m)	Total Weight per Piece (kg)	Length (m)	Article Number
19	24,00	2,50	80	7,00	0,69	0,04600	10,00	50	112507019050
25	30,00	2,60	110	7,00	0,69	0,01900	12,50	50	112507025050
30	35,60	3,00	130	7,00	0,69	0,31000	15,50	50	112507030050
32	37,60	3,00	140	7,00	0,69	0,04300	16,00	50	112507032050
35	41,00	3,20	150	6,00	0,59	0,38000	19,00	50	112507035050
38	44,40	3,20	180	6,00	0,59	0,42000	21,00	50	112507038050
40	46,60	3,30	190	6,00	0,59	0,47000	23,50	50	112507040050
45	51,60	3,40	220	5,00	0,59	0,53000	26,50	50	112507045050
50	56,80	3,70	240	5,00	0,59	0,64000	32,00	50	112507050050
63	70,00	3,90	290	5,00	0,59	0,81000	40,50	50	112507063050
90	98,80	4,40	450	4,00	0,69	1,56000	78,00	50	112507090050
100	111,40	5,40	500	4,00	0,59	1,71000	85,50	50	112507100050