


## PU 600 C ECO

Light weight and very flexible spiral hose made of Polyether-Polyurethane

- Applications** extraction systems, extractions arms, venting, dust extraction, textile fiber extraction
- Structure** TPU / Polyether-Polyurethane, uncolored, transparent, steel wire / spring steel wire / not coated / copper plated
- Temperature** -40°C up to 90°C, short term up to 125°C
- Properties** light weight, very good flexibility, very good abrasion resistance, good tensile strength, ultimate elongation, hydrolysis & microbe resistant, good ozone- & UV-resistance, weather proof, rot proof

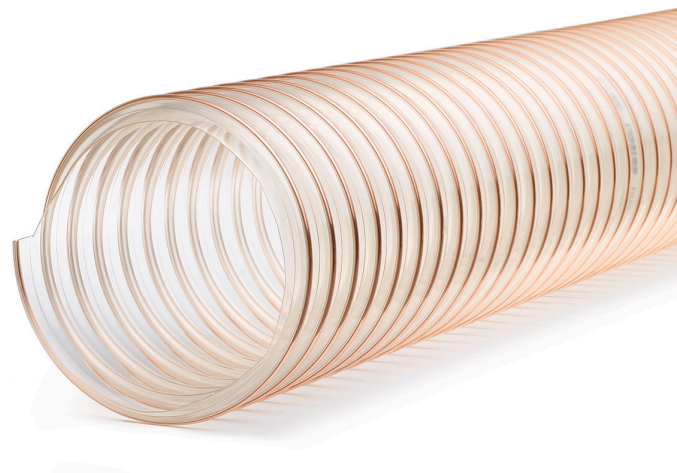

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Operating Pressure (bar)	Vacuum Max. (bar)	Weight (kg/m)	Length (m)	Article Number
40	45,00	0,60	40	0,70	0,35	0,24000	10	100306040010
40	45,00	0,60	40	0,70	0,35	0,24000	15	100306040015
51	56,00	0,60	51	0,60	0,25	0,30300	10	100306051010
51	56,00	0,60	51	0,60	0,25	0,30300	15	100306051015
60	65,00	0,60	60	0,60	0,25	0,35400	10	100306060010
60	65,00	0,60	60	0,60	0,25	0,35400	15	100306060015
76	81,00	0,60	76	0,60	0,25	0,49100	10	100306076010
76	81,00	0,60	76	0,60	0,25	0,49100	15	100306076015