


## SMARTFLEX 2.0

Very heavy weight Polyurethane hose, flame retardant

- Applications** conveying of abrasive media, roof graveling, vacuum conveyor, fish farming, gravel conveying
- Structure** TPU / Polyether-Polyurethane, transparent, steel wire / spring steel wire / not coated / copper plated
- Temperature** -40°C up to 100°C, short term up to 125°C
- Properties** flame-retardant, permanently antistatic ( $R < 10^9$  Ohm), hydrolysis & microbe resistant, very smooth inside, corrugated outside
- Norms** flame-retardant according to DIN 4102 / B1 | TRBS 2153/TRGS 727, ATEX 2014/34/EU / pneumatic transport of combustible dusts (inside: zone 20, 21, 22) | discharge capability according to BGI 739-2 with spiral earthing | DIN 26057-4

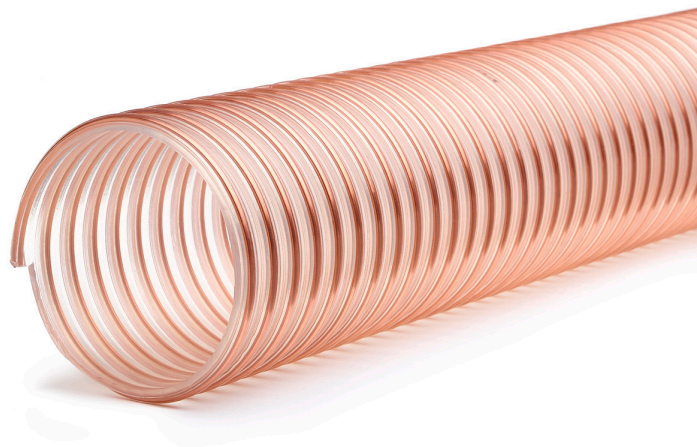

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Total Weight per Piece (kg)	Length (m)	Article Number
51	63,00	2,00	126	3,19	0,95	10,42	10	100315051010
60	72,00	2,00	150	2,80	0,95	12,26	10	100315060010
60	72,00	2,00	150	2,80	0,95	18,39	15	100315060015
76	88,00	2,00	190	2,25	0,95	13,90	10	100315076010