


FURTUN VENTILATIE P2 A1000

Light weight and highly flexible spiral hose made of PVC-coated polyester fabric

| | |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Applications | extractions arms, fume extraction, welding gas extraction, air & cooling technology, ventilation |
| Structure | coated fabrics / PVC coated polyester fabric, grey / silver grey (similar RAL 7001), opaque, steel wire / spring steel wire / not coated / copper plated |
| Temperature | -30°C up to 80°C, short term up to 100°C |
| Properties | excellent flexibility, good temperature resistance, good low-temperature flexibility, excellent axial compressibility, particularly small bending radius ($r < d$), flame-retardant, self-extinguishing |
| Norms | flame-retardant according to UL 94 fire protection standard / VO |
| Optional | - black polyester fabric |

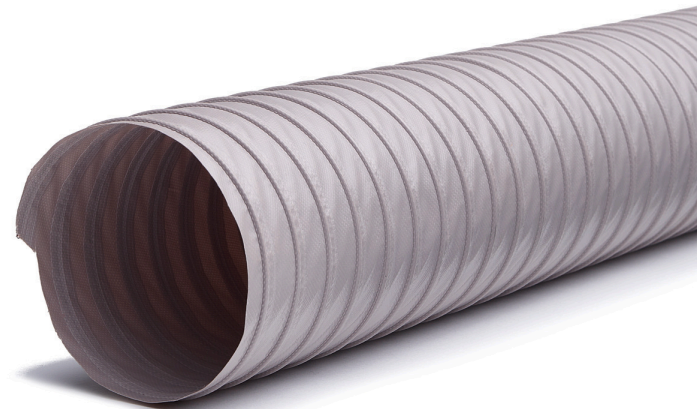

| Inner Diameter (mm) | Outer Diameter (mm) | Wall Thickness (mm) | Bending Radius (mm) | Max. Operating Pressure (bar) | Vacuum Max. (bar) | Total Weight per Piece (kg) | Length (m) | Article Number |
|---------------------|---------------------|---------------------|---------------------|-------------------------------|-------------------|-----------------------------|------------|----------------|
| 60 | 63,00 | 0,25 | 42 | 0,80 | 0,16 | 2,17 | 10 | 100351060010 |
| 102 | 106,00 | 0,25 | 74 | 0,50 | 0,09 | 3,51 | 10 | 100350100010 |
| 120 | 124,00 | 0,25 | 85 | 0,50 | 0,08 | 4,11 | 10 | 100350120010 |
| 152 | 156,00 | 0,25 | 108 | 0,20 | 0,06 | 5,18 | 10 | 100350152010 |
| 180 | 185,00 | 0,25 | 120 | 0,20 | 0,05 | 7,21 | 10 | 100350180010 |
| 203 | 208,00 | 0,25 | 145 | 0,20 | 0,05 | 8,11 | 10 | 100350203010 |
| 254 | 259,00 | 0,25 | 180 | 0,10 | 0,04 | 10,11 | 10 | 100350254010 |
| 300 | 305,00 | 0,25 | 210 | 0,06 | 0,03 | 11,91 | 10 | 100350300010 |